


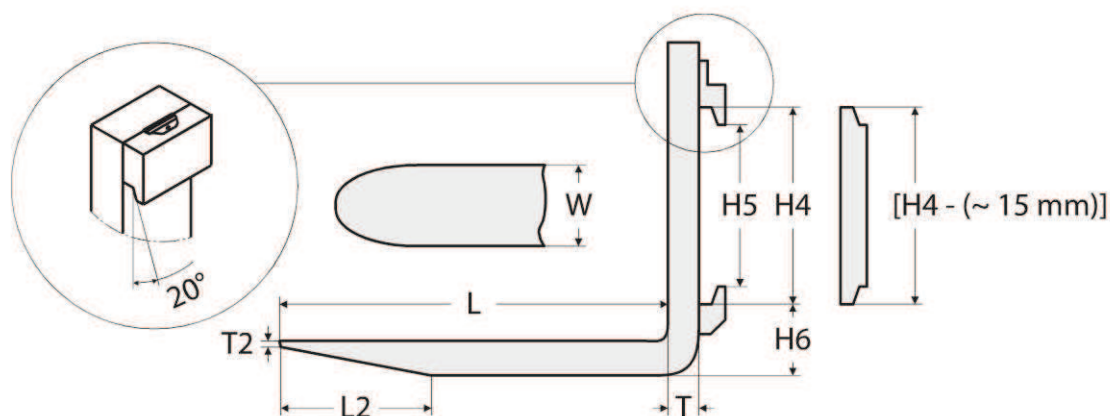

Class FEM - I.T.A.	Lift truck capacity	"Norm"	H6	"Carriage" height B	H5	We propose to use fork section = W x T
1	0-999 kg	1A	76 mm	331 mm	306 mm	80 x 35 mm
		1B	114 mm			
2	1000 - 1500 kg	2A	76 mm	407 mm	382 mm	80 x 40 mm
		2B	152 mm			100 x 32 mm
						100 x 35 mm
2	1800 - 2000 kg	2A	76 mm	407 mm	382 mm	100 x 40 mm
		2B	152 mm			100 x 45 mm
						120 x 40 mm
2	2200 - 2500 kg	2A	76 mm	407 mm	382 mm	100 x 45 mm
		2B	152 mm			125 x 40 mm
						125 x 45 mm
3	2800 - 3500 kg	3A	76 mm	508 mm	477 mm	100 x 45 mm
		3B	203 mm			100 x 50 mm
						125 x 45 mm
3	3500 - 4999 kg	3A	76 mm	508 mm	477 mm	125 x 50 mm
		3B	203 mm			130 x 60 mm
						150 x 50 mm
4	5000 - 9000 kg	4A	127 mm	635 mm	598 mm	130 x 60 mm
		4B	254 mm			150 x 60 mm
						150 x 70 mm